




Profile Description:

Manufactured to create a modern horizontal design element with a 1/2" reveal that captures the top edge of 5/16" fiber cement panels. The exposed flange is designed with a downward slope allowing for ancillary moisture to be directed away from the building envelope. Additionally, the horizontal member is designed to overlap the vertical member, eliminating field fabricated joints.

FbC-P-Reveal Hoz

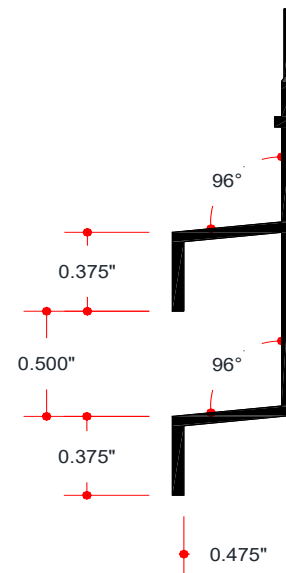

Alternative Horizontal Design Options

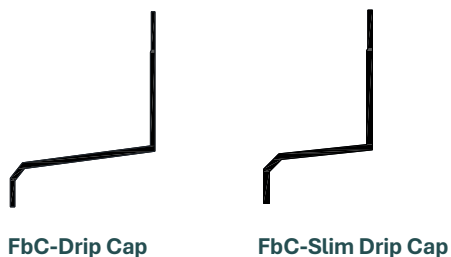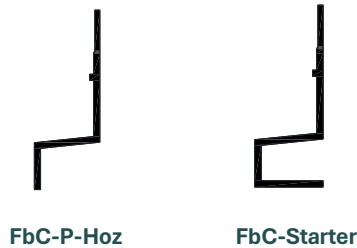

Material Length 10' (120")
Material Composition 6063 T5
Standard Finishes Field Paintable
 Powder Coated
 Clear Anodized

Field Painting Instructions

Orsted provides a high-quality coating designed to accept direct-to-metal, acrylic, and latex paint. Aluminum should be free of dirt, oil, and other contaminants that can compromise paint adhesion. Reference best practices for further instructions.

Cutting Instructions

Orsted recommends using full-length material when field conditions allow, minimizing abutting joints. To achieve a high-quality cut, use a non-ferrous carbide blade with a high tooth count (90+) along with commercial grade equipment. Reference best practices for further instructions.

Western USA

Patrick O'Neill
 404.376.0243
 patrick@orstedusa.com
 6779 W. Targee St.
 Boise, ID 83709



Eastern USA

Jonathan Kurtz
 404.431.9605
 jonathan@orstedusa.com
 2272 Mabros Ind. Pkwy.
 Ellenwood, GA 30294