



## Profile Description:

Manufactured to create a modern inside corner design element that captures the edges of 5/16" fiber cement panels as they transition to 5/16" lap siding planks. Providing a clean and modern aesthetic along with protection for panel and plank edges.


## Alternative Inside Corner Design Options



FbC-P-Captured ISC




FbC-P-Sharp ISC



FbC-L-Captured ISC Lap

## FbC-T-Captured ISC TR

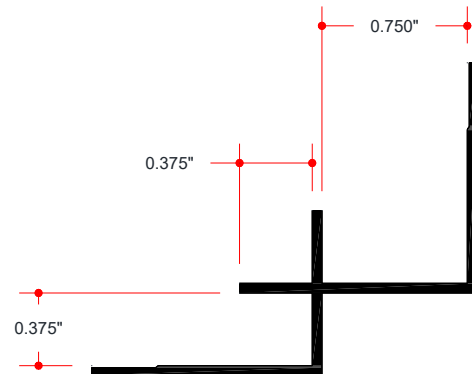

Material Length 10' (120")

Material Composition 6063 T5

Standard Finishes Field Paintable

Powder Coated

Clear Anodized

## Field Painting Instructions

Orsted provides a high-quality coating designed to accept direct-to-metal, acrylic, and latex paint. Aluminum should be free of dirt, oil, and other contaminants that can compromise paint adhesion. Reference best practices for further instructions.

## Cutting Instructions

Orsted recommends using full-length material when field conditions allow, minimizing abutting joints. To achieve a high-quality cut, use a non-ferrous carbide blade with a high tooth count (90+) along with commercial grade equipment. Reference best practices for further instructions.

### Western USA

Patrick O'Neill  
404.376.0243  
patrick@orstedusa.com  
6779 W. Targee St.  
Boise, ID 83709



www.orstedusa.com

### Eastern USA

Jonathan Kurtz  
404.431.9605  
jonathan@orstedusa.com  
2272 Mabros Ind. Pkwy.  
Ellenwood, GA 30294