



## Profile Description:

Manufactured to create a traditional outside corner design element that captures the edges of 5/16" fiber cement lap siding planks. Providing a clean and modern aesthetic along with a protective element for overlapping plank edges. If used in a horizontal application, do not install in a manner where the aesthetic flange can accumulate moisture.


## FbC-L-X OSC Lap

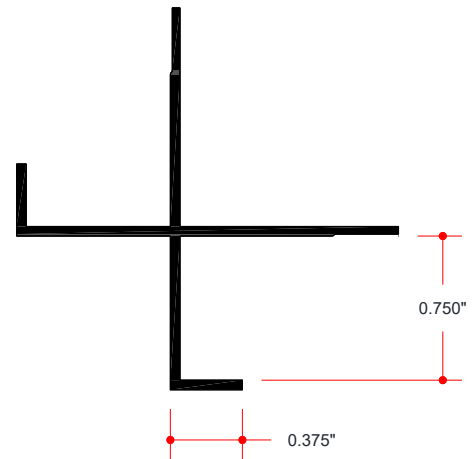

## Alternative Outside Corner Design Options




FbC-P-X OSC



FbC-L-Captured OSC Lap



FbC-P-Captured OSC



FbC-T-X OSC TR

**Material Length** 10' (120")  
**Material Composition** 6063 T5  
**Standard Finishes** Field Paintable  
 Powder Coated  
 Clear Anodized

## Field Painting Instructions

Orsted provides a high-quality coating designed to accept direct-to-metal, acrylic, and latex paint. Aluminum should be free of dirt, oil, and other contaminants that can compromise paint adhesion. Reference best practices for further instructions.

## Cutting Instructions

Orsted recommends using full-length material when field conditions allow, minimizing abutting joints. To achieve a high-quality cut, use a non-ferrous carbide blade with a high tooth count (90+) along with commercial grade equipment. Reference best practices for further instructions.

### Western USA

Patrick O'Neill  
 404.376.0243  
 patrick@orstedusa.com  
 6779 W. Targee St.  
 Boise, ID 83709



### Eastern USA

Jonathan Kurtz  
 404.431.9605  
 jonathan@orstedusa.com  
 2272 Mabros Ind. Pkwy.  
 Ellenwood, GA 30294