



Profile Description:

Manufactured to create a modern outside corner design element that captures the edges of 5/16" fiber cement lap siding planks. Providing a clean and modern aesthetic along with a protective element for overlapping plank edges. If used in a horizontal application, do not install in a manner where the aesthetic flange can accumulate moisture.

Alternative Outside Corner Design Options




FbC-P-X OSC



FbC-L-X OSC Lap




FbC-P-Captured OSC



FbC-T-X OSC TR

FbC-L-Captured OSC Lap

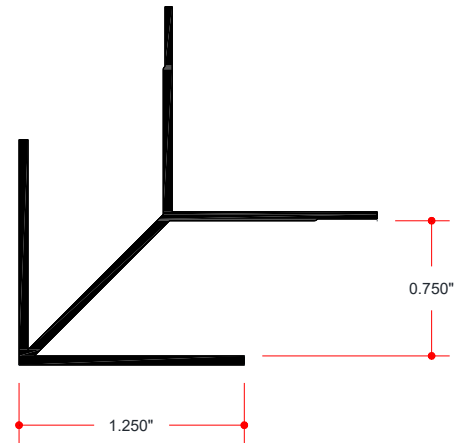

Material Length 10' (120")

Material Composition 6063 T5

Standard Finishes Field Paintable

Powder Coated

Clear Anodized

Field Painting Instructions

Orsted provides a high-quality coating designed to accept direct-to-metal, acrylic, and latex paint. Aluminum should be free of dirt, oil, and other contaminants that can compromise paint adhesion. Reference best practices for further instructions.

Cutting Instructions

Orsted recommends using full-length material when field conditions allow, minimizing abutting joints. To achieve a high-quality cut, use a non-ferrous carbide blade with a high tooth count (90+) along with commercial grade equipment. Reference best practices for further instructions.

Western USA

Patrick O'Neill
404.376.0243
patrick@orstedusa.com
6779 W. Targee St.
Boise, ID 83709



www.orstedusa.com

Eastern USA

Jonathan Kurtz
404.431.9605
jonathan@orstedusa.com
2272 Mabros Ind. Pkwy.
Ellenwood, GA 30294