


Profile Description:

Manufactured to create a modern vertical design element with a 1/2" reveal that captures the edges of 5/16" fiber cement panels. Designed with interlocking tabs allowing for non-progressive installation techniques while providing a protective element for panel edges. If used in a horizontal application, do not install in a manner where the aesthetic flange can accumulate moisture. Orsted recommends that the insert is additionally secured with either construction adhesive or mechanical fasteners. This two piece assembly includes both the insert and retainer.

Alternative Vertical Design Options



FbC-P-Snap Reveal Vert

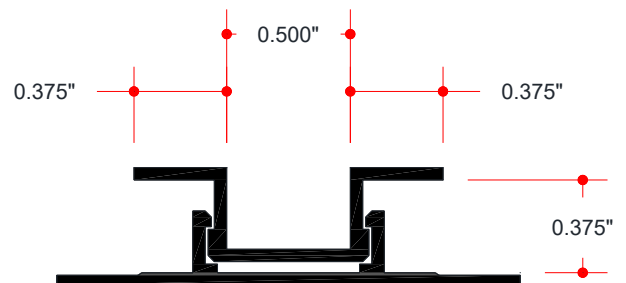

Material Length 10' (120")

Material Composition 6063 T5

Standard Finishes Field Paintable

Powder Coated

Clear Anodized

Field Painting Instructions

Orsted provides a high-quality coating designed to accept direct-to-metal, acrylic, and latex paint. Aluminum should be free of dirt, oil, and other contaminants that can compromise paint adhesion. Reference best practices for further instructions.

Cutting Instructions

Orsted recommends using full-length material when field conditions allow, minimizing abutting joints. To achieve a high-quality cut, use a non-ferrous carbide blade with a high tooth count (90+) along with commercial grade equipment. Reference best practices for further instructions.

Western USA

Patrick O'Neill
404.376.0243
patrick@orstedusa.com
6779 W. Targee St.
Boise, ID 83709



Eastern USA

Jonathan Kurtz
404.431.9605
jonathan@orstedusa.com
2272 Mabros Ind. Pkwy.
Ellenwood, GA 30294